



R&M
FIXINGS & SUPPORT LTD

Conlok[®], Quick fit Conduit Accessories

Patent Pending

- The Conlok[®] conduit box is to all intents a standard conduit box, with a 20mm or 25mm Clearance inlet, replacing the typically threaded inlet, with the conduit being accepted and mechanically locked to the conduit by way of a 12.9 Grade z/p Socket Grub Screw. The Spout walls have been increased dimensionally to allow for the Grub screw to gain maximum amount of torsion against the conduit.
- Substantially reduced on-site labour, with no conduit threading required
- Allows more efficient use of skilled labour.
- 12.9 Grade, Serrated Socket Grub Screw, to give maximum earth continuity.
- "Socket Pin" Security Grub Screws can be supplied on request.
- Can be used on Existing Installations
- Reduce possible Health and Safety Issues.
- Conforms to BS EN 61386-21:2004, Test Certificates can be supplied on request
- The Conlok system is the only system to supply the complete range of 20mm and 25mm accessories
- Through time trials the Conlok system has been proved to reduce labour by a staggering 75%





R&M


FIXINGS & SUPPORTS LTD

Code	Size	Description	Box Qty	Weight	Price
CL1G	20mm	Conlok Galv End Box	10	2.3kg	£2.25 Each
CL2G	20mm	Conlok Galv Through Box	10	2.4kg	£2.45 Each
CL3G	20mm	Conlok Galv Angle Box	10	2.4kg	£2.45 Each
CL4G	20mm	Conlok Galv Tee Box	10	2.7kg	£2.55 Each
CL5G	20mm	Conlok Galv 4 Way Box	10	2.9kg	£2.65 Each
CL6G	20mm	Conlok Galv U Box	10	2.4kg	£2.80 Each
CL7G	20mm	Conlok Galv Y Box	10	2.7kg	£2.85 Each
CL8G	25mm	Conlok Galv End Box	10	2.7kg	£2.75 Each
CL9G	25mm	Conlok Galv Through Box	10	2.8kg	£3.10 Each
CL10G	25mm	Conlok Galv Angle Box	10	2.8kg	£3.10 Each
CL11G	25mm	Conlok Galv Tee Box	10	3.0kg	£3.30 Each
CL12G	25mm	Conlok Galv 4 Way Box	10	3.6kg	£3.40 Each
CL13G	25mm	Conlok Galv U Box	10	2.8kg	£3.40 Each
CL14G	25mm	Conlok Galv Y Box	10	3.0kg	£3.40 Each
CL16G	20mm	Conlok Galv Back Outlet Box	10	2.3kg	£3.05 Each
CL20GC	20mm	Conlok 20mm Galv Coupler	100	4.5kg	£0.85 Each
CL25GC	25mm	Conlok 25mm Galv Coupler	50	2.7kg	£1.10 Each
CL20GA	20mm	Conlok 20mm Galv Adaptor	100	4.0kg	£1.10 Each
CL25GA	25mm	Conlok 25mm Galv Adaptor	50	3.0kg	£1.40 Each
CLKEY	2mm	Conlok Allen Key	1		£3.40 Each

Prices are subject to discount.

All boxes in the range can be supplied with a 20mm or 25mm Clearance hole in the rear, for connecting directly onto Trunking or Tray, using a male brass bush.

The wall thickness of the spout has been increased to accommodate maximum grub screw torque.

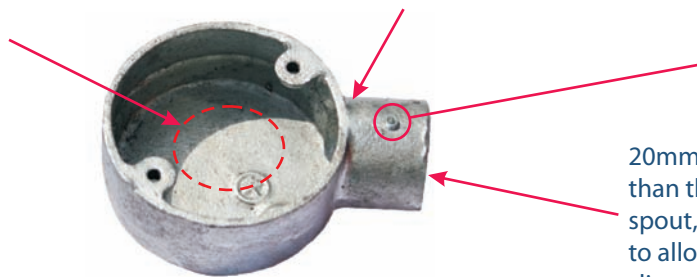

12.9 Grade Zinc plated, cup pointed grub screw.

20mm and 25mm Clearance hole, rather than the typical, internally threaded spout, with in-built internal depth stop, to allow for the conduit to be easily slipped into place.

Simply cut & deburr the conduit, insert the Conlok box and tighten the grub screw ®

For more information on this product contact us

023 8038 6800

R&M Fixings & Supports Ltd

Unit 6, Central Trading Estate, Marine Parade, Southampton, Hampshire SO14 5JP

Fax: **023 8038 6808** Email: fixings@rm-electrical.com

www.rm-electrical.com