

**THE PUSH FIT
FLEXIBLE SYSTEM**



The range consists of a pre-determined length of wire with either a loop, concrete anchor or M8 eye bolt.

- R 90kg SWL (concrete anchor)
- R 100kg SWL (loop or eye fixing)
- Locking C-Clip
- C-Clip to prevent upward movement
- High tensile galvanised wire rope 1 - 10m
- Red safety end cap




- Key free release. No tools required
- Flexible, ideal if anchor point not straight above
- Easy to cut
- Speed of installation
- Fully lockable into channel

APPLICATION

- Suitable for supporting:
- Trapeze Brackets
 - Modular Systems
 - Rectangular Ducting



- ⇨ Zamac 5 housing incorporating oil impregnated sintered steel wedge
- ⇨ High tensile galvanised wire 1960 N/mm² grade 7 X 7 construction
- ⇨ Locking C-Clip
- ⇨ BSEN 12385 Standard

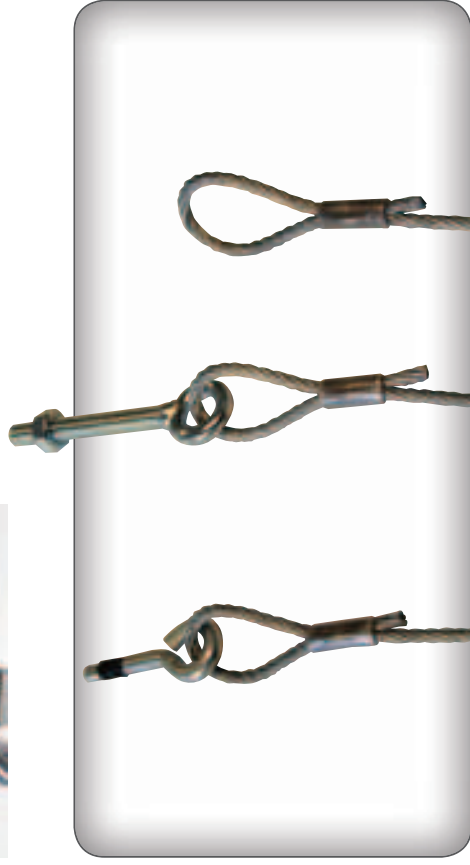



INSTALLATION METHOD

- Loop-screw or drill your end into or around your chosen anchor point.
- Position if required the C-Clip onto your wire.
- Position plus clip into channel and slide the wire through the clip.
- To adjust simply remove the C-Clip and release the load from the Plus clip by pushing the clip up the wire. Then simply pull down on the release key at the same time.

DROP LENGTH	PRODUCT CODES	
	Loop end	Concrete anchor end
1 Metre	PLR1	PLR1E8
2 Metre	PLR2	PLR2E8
3 Metre	PLR3	PLR3E8
4 Metre	PLR4	PLR4E8
5 Metre	PLR5	PLR5E8

6-10 metres and M10 eye bolt are also available

PRODUCT	CODE	DESCRIPTION
	PLU02	Plus Clip 5:1 S.F. 100kg SWL
	Zip-C	Locking C-Clip

