

UNIVERSAL CONCRETE ANCHOR SYSTEM FOR ALL CONCRETE TYPES



The range consists of a pre-determined length of wire from 1 metre to 10 metres with a choice of Safe Working Load:

- G 10kg
- S 50kg
- R 75kg

The system consists of wire and clip with a ferruled CLAI concrete anchor.


- Key free suitable for all slagged, cracked, slab & hollow pot concrete types
- Approved for concrete C12/15, C20/25 to C50/60 & hollow pot
- No claw back required
- Can also be supplied with double wire drop

APPLICATION

Suitable for concrete application including:

- Cracked Concrete
- Reinforced Concrete
- Slagged Concrete C15 / C35
- Hollow Pot
- And all other existing features

- ✧ Nail anchor for hammerset installation
- ✧ The installed nail anchor expands automatically under load, pulls the cone into the expansion clip and expands against the wall
- ✧ No claw back required
- ✧ High tensile galvanised wire 1960 N/mm² grade 7 X 7 construction
- ✧ BSEN 12385 Standard

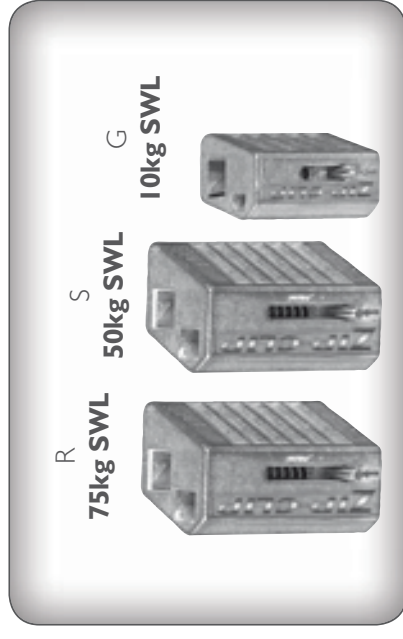

10kg SWL

PRODUCT CODE	DESCRIPTION	SAFE WORKING LOAD
CLG1	1 Metre Con-Lock G. 10 pieces per pack	10kg SWL
CLG1.5	1.5 Metre Con-Lock G. 10 pieces per pack	10kg SWL
CLG2	2 Metre Con-Lock G. 10 pieces per pack	10kg SWL
CLG3	3 Metre Con-Lock G. 10 pieces per pack	10kg SWL
CLG4	4 Metre Con-Lock G. 10 pieces per pack	10kg SWL
CLG5	5 Metre Con-Lock G. 10 pieces per pack	10kg SWL
CLG10	10 Metre Con-Lock G. 10 pieces per pack	10kg SWL

50kg SWL

CLS1	1 Metre Con-Lock S. 10 Pieces per pack	50kg SWL
CLS1.5	1.5 Metre Con-Lock S. 10 Pieces per pack	50kg SWL
CLS2	2 Metre Con-Lock S. 10 Pieces per pack	50kg SWL
CLS3	3 Metre Con-Lock S. 10 Pieces per pack	50kg SWL
CLS4	4 Metre Con-Lock S. 10 Pieces per pack	50kg SWL
CLS5	5 Metre Con-Lock S. 10 Pieces per pack	50kg SWL
CLS10	10 Metre Con-Lock S. 10 Pieces per pack	50kg SWL

75kg SWL

CLR1	1 Metre Con-Lock R. 10 Pieces per pack	75kg SWL
CLR1.5	1.5 Metre Con-Lock R. 10 Pieces per pack	75kg SWL
CLR2	2 Metre Con-Lock R. 10 Pieces per pack	75kg SWL
CLR3	3 Metre Con-Lock R. 10 Pieces per pack	75kg SWL
CLR4	4 Metre Con-Lock R. 10 Pieces per pack	75kg SWL
CLR5	5 Metre Con-Lock R. 10 Pieces per pack	75kg SWL
CLR10	10 Metre Con-Lock R. 10 Pieces per pack	75kg SWL

Sizes 6-9 metres are also available



INSTALLATION METHOD

- Drill a 6mm hole to a minimum depth of 30mm
- Hammer in the fixing
- Anchor is now fixed. No claw back required
- Pass the wire through the clip in the direction of the arrow
- Pass through or around your required suspension and back through the clip.

