


# DEC LOCK

## THE COMPLETE DECKING SUPPORT SYSTEM

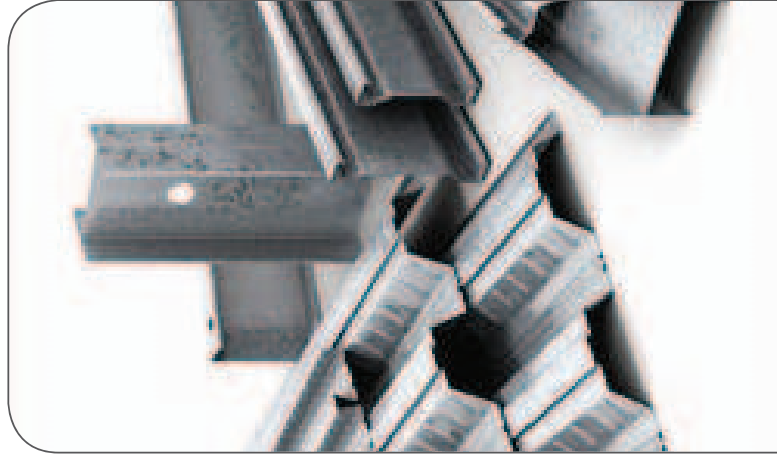

The range consists of a pre-determined length of wire from 1 metre to 10 metres with a choice of Safe Working Loads:

- G 10kg
- S 50kg

The system consists of a wire and clip with a ferruled decking fixing (MSN, MN, MNM or MA6810 wedge) with washer and nut threaded on to a UN12 with a M6x 45mm thread. Suitable for Kingspan Structural Products. Suitable for Structural Metal Decks / SMD and other steel decking manufacturers.

- All components fully assembled
- No on site assembly required
- Lockable system no drilling required
- Suitable where access to purlin is not available
- Key free release system


## APPLICATION

Suitable for decking applications including:

- Kingspan Structural Products
- Structural Metal Decks / SMD and other steel decking manufacturers



- CNC Engineered M6 x 45mm eyelet
- Trivalent zinc and clear galvanised eyelet, nut and washer
- High tensile galvanised wire 1960 N/mm<sup>2</sup> grade 7x7 construction
- BSEN 12385 Standard

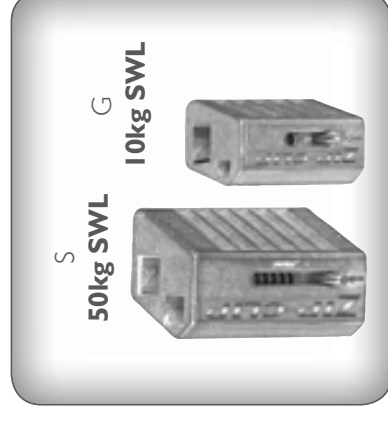

## 10kg SWL

PRODUCT CODE	DESCRIPTION	SAFE WORKING LOAD
DLG1	1 Metre Dec-Lock G. 10 pieces per pack	10kg SWL
DLG1.5	1.5 Metre Dec-Lock G. 10 pieces per pack	10kg SWL
DLG2	2 Metre Dec-Lock G. 10 pieces per pack	10kg SWL
DLG3	3 Metre Dec-Lock G. 10 pieces per pack	10kg SWL
DLG4	4 Metre Dec-Lock G. 10 pieces per pack	10kg SWL
DLG5	5 Metre Dec-Lock G. 10 pieces per pack	10kg SWL
DLG10	10 Metre Dec-Lock G. 10 pieces per pack	10kg SWL

## 50kg SWL

PRODUCT CODE	DESCRIPTION	SAFE WORKING LOAD
DLS1	1 Metre Dec-Lock S. 10 Pieces per pack	50kg SWL
DLS1.5	1.5 Metre Dec-Lock S. 10 Pieces per pack	50kg SWL
DLS2	2 Metre Dec-Lock S. 10 Pieces per pack	50kg SWL
DLS3	3 Metre Dec-Lock S. 10 Pieces per pack	50kg SWL
DLS4	4 Metre Dec-Lock S. 10 Pieces per pack	50kg SWL
DLS5	5 Metre Dec-Lock S. 10 Pieces per pack	50kg SWL
DLS10	10 Metre Dec-Lock S. 10 Pieces per pack	50kg SWL

Sizes 6-9 metres are also available



## INSTALLATION METHOD

- Pass the end fixing into decking profile and turn through 90degrees
- Screw the grub screw to the top of the decking profile
- Pass the wire through the clip in the direction of the arrow
- Pass through or around your required suspension and back through the clip.

Also available with our MA6810

